

# LED SLIM FULL CUT OFF WALL PACK FIXTURE

**QUICK SEARCH: SC12307**



## FEATURES:

- Two-piece die-cast aluminum housing secures the thermally conductive LED panel and electrical chamber
- Casting thermally conducts LED heat to optimize performance and long life
- Suitable for applications requiring 3G testing prescribed by ANSI C136.31
- Scalable Lumen Packages from 3,800 to 20,000 Lumens
- Anti-UV prismatic translucent len is designed to shape the light distribution and uniformity

## WARRANTY & LISTINGS:

- 5-year warranty
- UL cUL wet location listed
- DesignLights Consortium™ Qualified
- Wet Rated

## ELECTRICAL:

- Universal 120-277 or 347-380 VAC input voltage
- 1-10V Dimming
- Internal drivers have a power factor >90%, THD <20%
- Operating Temperature Range: -40°C to 40°C (-40°F - + 104°F)

*Note: Operating with emergency battery temperature range: 10°C to 40°C (+50° F - + 104° F)*

## SPECIFICATION:


Product Code	Wattage	Lumens	Color Temperature	LPW	Accessories
9516FCBZ026-50K	26W	3800 Lumens	5000K Daylight	150 lm/W	As Is - No Photocell
9516FCBZ026-50KP					Photocell
9516FCBZ026-50K-EM					Emergency Battery
9516FCBZ038-MCTP	38W	5600 Lumens	Color Selectable 30K/40K/50K	150 lm/W	Photocell
9516FCBZ038-MCTP-EM					Photocell Emergency Battery
9516FCBZ065-MCT	65W	Lumen Adjustable	Color Selectable 30K/40K/50K	146 lm/W	As Is - No Photocell
9516FCBZ065-MCTP					Photocell
9516FCBZ065-MCT-EM					Emergency Battery
9516FCBZ100-MCT	100W	Lumen Adjustable	Color Selectable 30K/40K/50K	150 lm/W	As Is - No Photocell
9516FCBZ100-MCTP					Photocell
9516FCBZ100-MCT-EM					Emergency Battery

# LED SLIM FULL CUT OFF WALL PACK FIXTURE

**QUICK SEARCH: SC12307**



## PHOTOMETRICS:

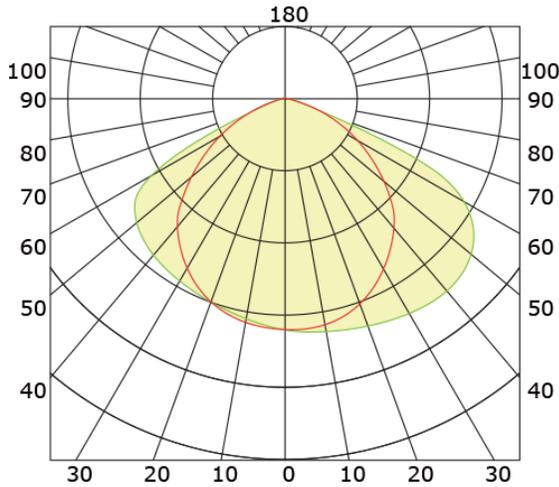

## ACCESSORIES:



### Photocell

USE: Photocell is field installed or pre-installed in factory by requesting



### Emergency Battery Backup

Description: It can be pre-installed in factory or field installed



### Power and CCT controller

USE: The wattage and CCT can be changed by switch selection on the controller.

Only suitable for 26W,38W,65W,100W

## DIMENSIONS:

