

Multi Color LED Curved Indirect Troffers

Search Code: SC65437




FEATURES

- **High Efficiency:** Up to 125 lm/W
- **Durable Construction:** White powder coat finish. Steel material housing with built-in earthquake clips for safety. The External driver is mounted on top.
- **Lens:** Soft and Wide Light-Emitting. No infrared rays, No Ultraviolet Radiation, No Thermal Effect. No flickering, No humming, No RF interference.
- **Beam Angle:** 110°
- **Versatile Applications:** Available in 2'x2' and 2'x4' options for recessed installations.
- **Dimmable Options:** 0-10v smooth dimming compatibility. Requires low voltage dimmer (extra low voltage wires will need to be run prior to installation).
- **Customizable Settings:** Available in multiple wattages and color temperatures. Color temperature is adjustable using a switch on the back panel allowing for 35/40/50K.
- **IP Rating:** IP20 damp location (Indoor use only).
- **Long Lifespan:** Rated for up to 50,000 operational hours.


ELECTRICAL

- **Voltage:** AC 120-277V.
- **CRI:** >80.
- **Power Factor:** > 0.90.
- **Current (mA):** 420/ 337/ 253mA.
- **Total Harmonic Distortion (THD):** < 20%.
- **Operating Temperature Range:** (-17°C to 40°C) 0°F to 104°F.
- **Frequency Range:** 50Hz~60Hz.

PHOTOMETRICS

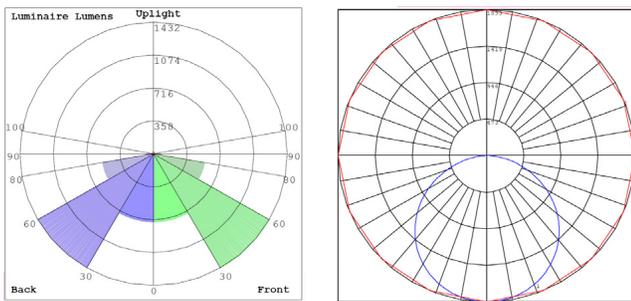

BUD Rating: B2-U2-G1

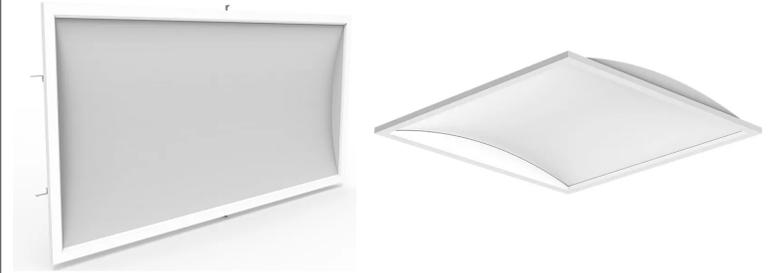

WARRANTY & LISTINGS

- **Warranty:** 5 years (50,000 operational hours).
- **Certifications:** UL Listed.


MOUNTING

- Standard grid ceiling drop in mounting.

APPLICATION

- Offices & Conference Rooms.
- Retail Stores & Showrooms.
- Hospitals & Healthcare Facilities.
- Schools & Universities.
- Hallways & Entryways.

DIMENSIONS

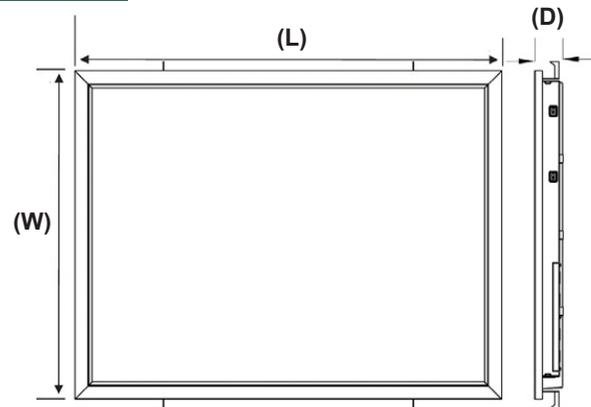

| Model | Length | Width | Depth |
|-------|--------|-------|-------|
| 2'x2' | 23.7" | 23.7" | 1.97" |
| 2'x4' | 47.6" | 23.7" | 1.97" |

ORDERING INFORMATION

| Product Code | Size | Wattage | Lumens | Color Temperature |
|---------------|-------|----------------------|--------|--------------------------|
| CITF-2X2-MCTP | 2'x2' | Multi Watt 40/30/25W | 5000L | Color Select 35K/40K/50K |
| CITF-2X4-MCTP | 2'x4' | Multi Watt 50/40/30W | 6250L | Color Select 35K/40K/50K |