

LED Decorative Linear 360 Degree Tube Lights

Search Code: SC65520



FEATURES


- **Durable Construction:** Architectural modern design. Aluminum housing with sandy white finish.
- **Lens:** Wraparound 360° PC Lens.
- **Versatile Applications:** Suitable for commercial settings such as offices, hotels, conference halls, and other indoor areas.
- **Dimmable:** 0-10V standard dimming compatibility with using low voltage dimmers.
- **Two 10FT Adjustable Suspension Cables with Canopies Included.**
- **Customizable Settings:** Available in multiple wattages. Multi CCT Choose from 2700K/3000K/3500K/4000K/5000K. Switches inside Canopy.
- **Beam Angle:** 360°.
- **IP Rating:** IP20 (Inoor Use Only).
- **Long Lifespan:** Rated for up to 50,000 operational hours.

ELECTRICAL

- **Input Voltage:** 120-277VAC.
- **CRI:** ≥80.
- **Power Factor:** >0.95.
- **Operating Temperature Range:** (-17°C to 40°C) 0°F to 104°F.
- **Frequency Range:** 50Hz~60Hz.
- **Dimming:** 0-10V standard - requires low voltage dimmer.

APPLICATION

- Lobbys.
- Meeting Rooms.
- Condos.
- Conference Halls.
- Offices.
- Saloons.
- Libraries.

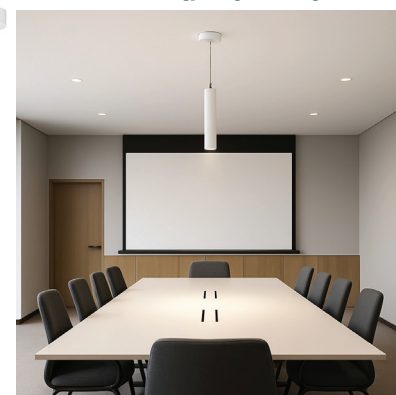


WARRANTY & LISTINGS

- **Warranty:** 5 years (50,000 operational hours).
- **Certifications:** UL Listed. IP Rating: IP20.

MOUNTING

- **Standard Suspension Mount.**

DIMENSIONS

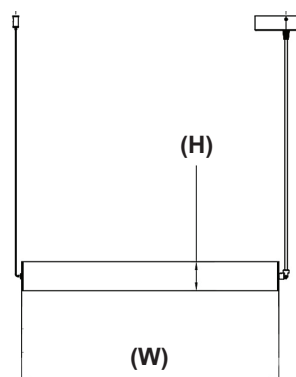

Model	Dimensions
DCTL360-2FT	24.43"(W) x 2.76"(H)
DCTL360-3FT	36.26"(W) x 2.76"(H)
DCTL360-4FT	48.07"(W) x 2.76"(H)
DCTL360-6FT	71.55"(W) x 2.76"(H)
DCTL360-8FT	95.16"(W) x 2.76"(H)

ORDERING INFORMATION

Product Code	Size	Wattage	Lumens	Voltage	Finish
DCTL360-2FT-MW-MCT-WH	2 Foot	Multiwatt 17/19/21/23	1840L	120-277V	White
DCTL360-3FT-MW-MCT-WH	3 Foot	Multiwatt 25/27/29/31	2480L	120-277V	White
DCTL360-4FT-MW-MCT-WH	4 Foot	Multiwatt 33/35/37/39	3120L	120-277V	White
DCTL360-6FT-MW-MCT-WH	6 Foot	Multiwatt 50/54/58/62	4960L	120-277V	White
DCTL360-8FT-MW-MCT-WH	8 Foot	Multiwatt 66/70/74/78	6240L	120-277V	White