

# Decorative Linear Tube Lights

Search Code: SC65519



## FEATURES

- **Durable Construction:** Architectural modern design. Aluminum housing with sandy white or black finish.
- **Lens:** Opal Polycarbonate Tube Lens - Direct Down Light.
- **Versatile Applications:** Suitable for commercial settings such as offices, hotels, conference halls, and other indoor areas.
- **Dimmable:** 0-10V standard dimming compatibility with using low voltage dimmers.
- **Two 10FT Adjustable Suspension Cables.**
- **Customizable Settings:** Available in multiple wattages. Multi CCT Choose from 3000K/ 3500K/ 4000K. Switches inside Canopy.
- **Beam Angle:** 115°(H) x 109.6°(V).
- **IP Rating:** IP20 (Inoor Use Only).
- **Long Lifespan:** Rated for up to 50,000 operational hours.

## ELECTRICAL

- **Input Voltage:** 120-277VAC.
- **CRI:** ≥80.
- **Power Factor:** >0.95.
- **Operating Temperature Range:** (-17°C to 40°C) 0°F to 104°F.
- **Frequency Range:** 50Hz~60Hz.
- **Dimming:** 0-10V standard - requires low voltage dimmer.

## APPLICATION

- Lobbys.
- Meeting Rooms.
- Condos.
- Conference Halls.

## Finish Selection




## WARRANTY & LISTINGS

- **Warranty:** 5 years (50,000 operational hours).
- **Certifications:** UL Listed. IP Rating: IP20.

## MOUNTING

- **Suspended Pendant Mount.**

## DIMENSIONS

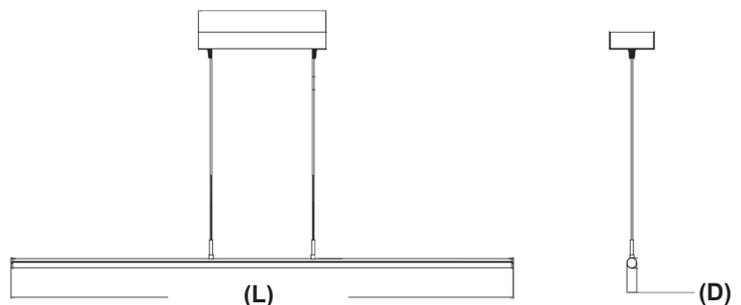

Model	Dimensions
DLTL-4FT	46 3/8"(L) x 1"(D)
DLTL-6FT	70 3/8"(L) x 1"(D)
DLTL-8FT	92 3/8"(L) x 1"(D)

## ORDERING INFORMATION

Product Code	Size	Wattage	Lumens	Voltage	Finish
DLTL-4FT-20-30W-MCT-WH	4 Foot	Multiwatt 20W/25W/30W	3150L	120-277V	White
DLTL-4FT-20-30W-MCT-BK	4 Foot	Multiwatt 20W/25W/30W	3150L	120-277V	Black
DLTL-6FT-25-50W-MCT-WH	6 Foot	Multiwatt 25W/40W/50W	5250L	120-277V	White
DLTL-6FT-25-50W-MCT-BK	6 Foot	Multiwatt 25W/40W/50W	5250L	120-277V	Black
DLTL-8FT-40-60W-MCT-WH	8 Foot	Multiwatt 40W/50W/60W	6300L	120-277V	White
DLTL-8FT-40-60W-MCT-BK	8 Foot	Multiwatt 40W/50W/60W	6300L	120-277V	Black