

THERMOPLASTIC EMERGENCY UNIT


QUICK SEARCH: SC3982



FEATURES:

- Long lasting, efficient, ultra bright white LED lamp heads
- 1.0 watt (8 LEDs x 0.125 watt) per head
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution
- Adjustable LED lamp heads provide optimal center-to-center spacing
- Housing Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish

DIMENSIONS:

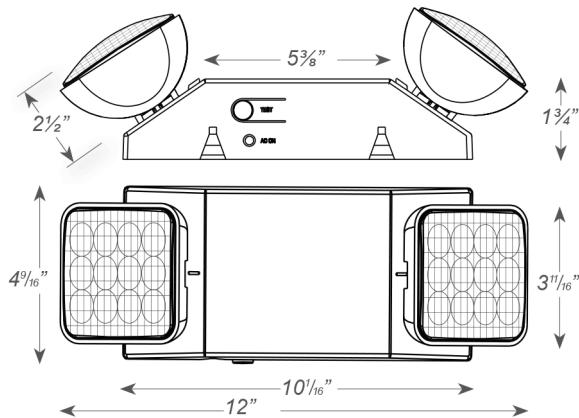

WARRANTY & LISTINGS:

- 5-year warranty
- UL listed for damp locations (0°C – 50°C) (32° - 122°F)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

ELECTRICAL:

- Dual 120/277 voltage standard
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 3.6V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

MOUNTING:

- Universal knockout pattern on back plate for surface mount
Screws into place making internal electrical connections
- Suitable for wall or ceiling mount
- Knockout for conduit applications

SPECIFICATION:

Product Code	Wattage	Optional Features	Color Temperature	Color
EM-1D-LED	1W	A Basic Unit - Most Common	5000K Daylight	White
LEDR-1-B		A Basic Unit - Most Common		Black

SQUARE OPTICS EMERGENCY UNIT


QUICK SEARCH: SC3982



FEATURES:

- Long lasting, efficient, ultra bright white LED lamp heads
- 1.0 watt (8 LEDs x 0.125 watt) per head
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution
- Two adjustable LED lamp heads provide optimal center-to-center spacing
- Housing Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black

DIMENSIONS:

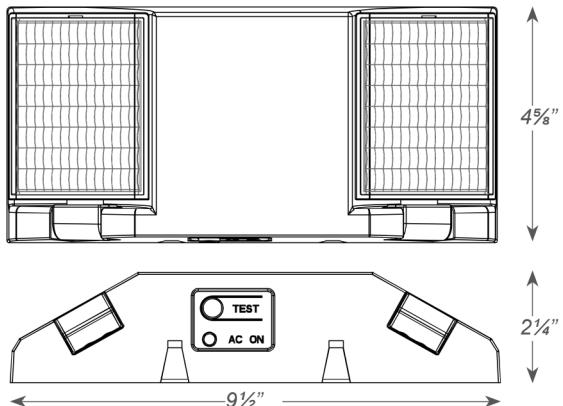

WARRANTY & LISTINGS:

- 5-year warranty
- UL listed for damp locations (0°C – 50°C) (32° - 122°F)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

ELECTRICAL:

- Dual 120/277 voltage standard. Optional multi-tap 208/220/240 voltage available
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 3.6V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

MOUNTING:

- Surface mount via easy connect back plate, which fits most standard junction boxes and snaps into place making internal electrical connections
- Top and side knockout for conduit applications
- Suitable for wall or ceiling mount

SPECIFICATION:

Product Code	Wattage	Optional Features	Color Temperature	Color
LEDR-2	1W	Square Heads	5000K Daylight	White
LEDR-2B		Square Heads		Black

HIGH LUMEN EMERGENCY UNIT


QUICK SEARCH: SC3982



FEATURES:

- Long lasting, efficient ultra bright white LED lamp heads.
- 1.7 watt (8 LEDs x 0.2125) per head
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution
- Adjustable LED lamp heads provides optimal center-to-center spacing

DIMENSIONS:

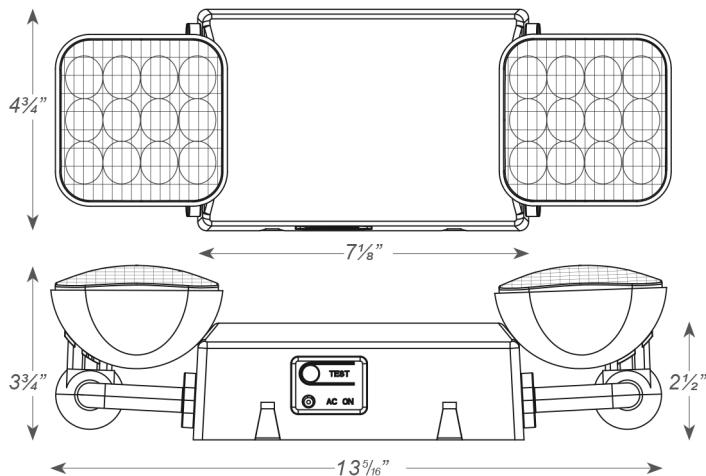

WARRANTY & LISTINGS:

- 5-year warranty
- UL listed for damp locations (0°C – 50°C) (32° - 122°F)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

ELECTRICAL:

- Dual 120/277 voltage standard
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 3.6V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

MOUNTING:

- Universal knockout pattern on back plate for surface mount
Screws into place making internal electrical connections
- Suitable for wall or ceiling mount
- Knockout for conduit applications

SPECIFICATION:

Product Code	Wattage	Optional Features	Color Temperature	Color
LEDRX-5HL	1.7W	High Lumen	5000K Daylight	White

REMOTE CAPABLE EMERGENCY UNIT


QUICK SEARCH: SC3982



FEATURES:

- Long lasting, efficient, ultra bright white LED lamp heads.
- 1 watt (8 LEDs x 0.125) per head
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution
- Adjustable LED lamp heads provides optimal center-to-center spacing

DIMENSIONS:

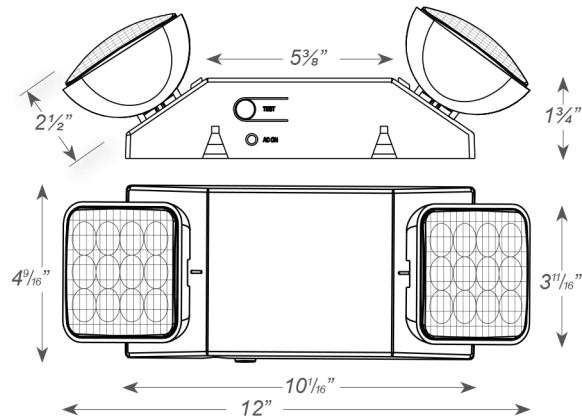

WARRANTY & LISTINGS:

- 5-year warranty
- UL listed for damp locations (0°C – 50°C) (32° - 122°F)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

ELECTRICAL:

- Dual 120/277 voltage standard
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 3.6V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

MOUNTING:

- Universal knockout pattern on back plate for surface mount. Snaps into place making internal electrical connections
- Suitable for wall or ceiling mount
- Knockout for conduit applications

SPECIFICATION:

Product Code	Wattage	Optional Features	Color Temperature	Color
LEDR-1SDT	1W	Automatic Self Tests	5000K Daylight	White
LEDR-1SDT-B		Automatic Self Tests		Black