

# RECESSED EMERGENCY UNIT


## QUICK SEARCH: SC3838



### FEATURES:

- Adjustable ultra bright 8W bi-pin halogen lamp head
- Sealed beam PAR36-type gimbal trim with smooth chromeplated metallized reflector and plastic lens offers optimal light distribution
- Steel mounting frame and housing
- 6" recessed housing with mounting bar hangers
- Impact-resistant thermoplastic adjustable gimbal trim
- Junction box with 3/4" knockouts for AC input.
- Trim securely attached to housing with spring clips

### DIMENSIONS:

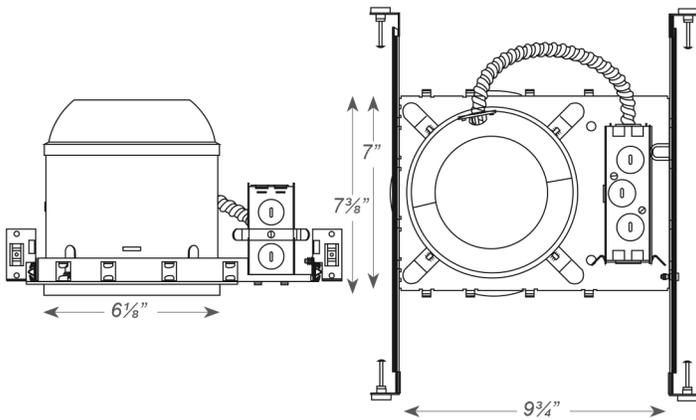

### WARRANTY & LISTINGS:

- 5-year warranty
- UL listed for damp locations (20°C – 40°C)(68°-104°F)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

### ELECTRICAL:

- Dual 120/277 voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- 6V maintenance-free, rechargeable sealed lead acid battery
- Internal solid-state transfer switch automatically connects the internal battery to lamp head for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

### MOUNTING:

- Compatible with drop ceiling mount installations. Bar hangers included

### SPECIFICATION:

Product Code	Wattage	Features	Color Temperature	Color
EMRL-1	8W	Adjustable Lamp Heads	2900K Soft white	White
EMRL-1-B				Black