

LED Full Cut-Off Wall Pack

Search Code: SC92713



FEATURES

- High Light Transmittance, Anti-UV and Fire Resistant PC Lens
- Die-Cast Aluminum With Powder Coat Finish (Dark Bronze)
- Multi CCT and Power (Switches are inside fixture)

ELECTRICAL

- Voltage: 120-277VAC 60Hz
- Power Factor: >0.95
- Efficacy: 135 LPW

MECHANICAL

- Die-Cast Aluminum With Powder Coat Finish (Dark Bronze)
- DC Button Photocell with ON/OFF switch Included
- High Light Transmittance, Anti-UV and Fire Resistant
- Shatterproof PC Lens
- Operating Temperature: 0°F to 104°F
- Full Cutoff, Dark Sky Compliant
- IP 65, Wet Location
- 5-Year Warranty

LIGHTING

- Dimming: 0~10V Dimmable
- Multi CCT and Power (Switches are inside fixture)
- The Type III Distribution Is Used for Wide Walkways, on Ramps and Entrance Roadways, As Well As Other Long, Narrow Lighting
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Rated Life: 50,000 Hrs





WARRANTY & LISTINGS

- Warranty: 5 years.

APPLICATIONS

- LED Wall Pack Light series can be widely used as exterior or interior applications such as: Hotels, Garages, Commercial Buildings, Public areas, Schools and Hospitals, etc.

DIMENSIONS

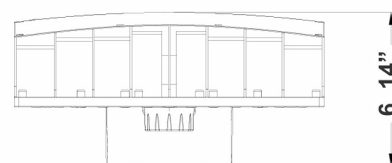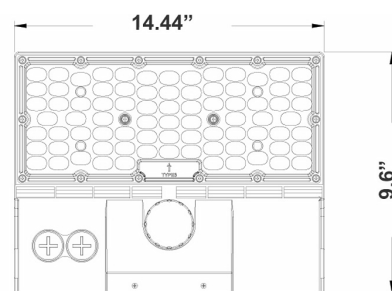


14.44" (W) x 9.6" (H) x 6.14" (D)


SPECIFICATIONS TABLE

Model No	Wattage	Voltage	Lumens	Color Temperature	LPW
FCWPX-35W-MCTP	21W, 28W, 35W	120~277V	2835LM, 3780LM, 4725LM	30K, 40K, 50K	135
FCWPX-60W-MCTP	36W, 48W, 60W	120~277V	4860LM, 6400LM, 8100LM	30K, 40K, 50K	135
FCWPX-100W-MCTP	60W, 80W, 100W	120~277V	8100LM, 10800LM, 13500LM	30K, 40K, 50K	135

PHOTOMETRICS

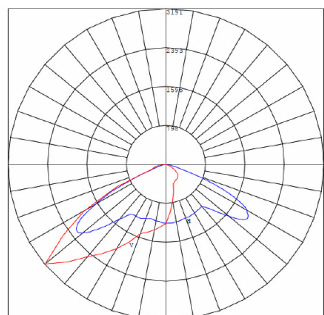

BUD Rating: B0-U0-G1

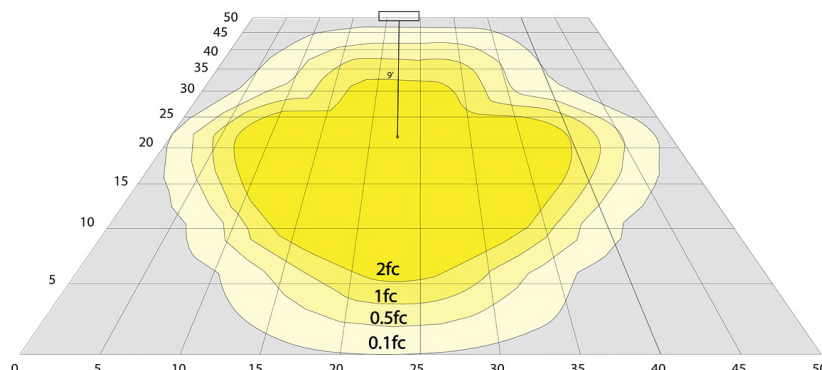

Area 45'x 50' Mounting Height: 9'

OTHER VIEWS

