

# LED Halo Pendant With Up/Down Lights


Search Code: SC96953




## ELECTRICAL

- Voltage: 120-277V AC 50/60Hz
- Wattage: Independent switches to control output for both up and down light
- Power Factor: >0.98
- LPW: 75 LM/W
- Aluminum housing available in a black or white finish
- Three 10FT Adjustable Suspension Cables
- Opal Polycarbonate Lens - Direct and Indirect Light
- Operating Temperature: 0°F to 104°F
- IP Rating: IP20

## DIMENSIONS

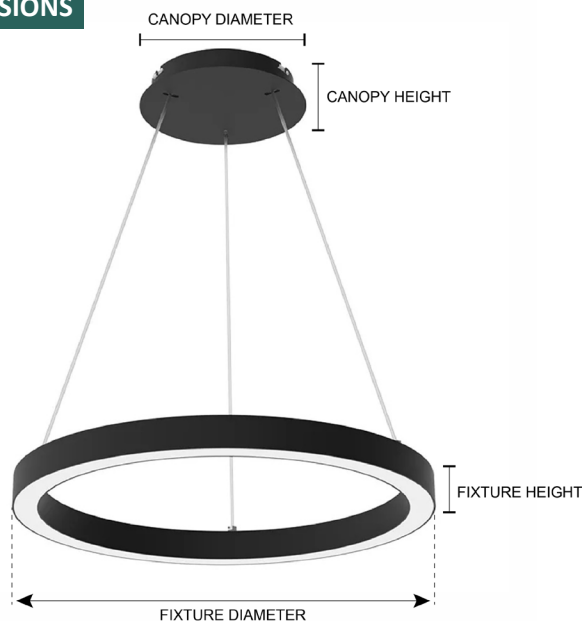

Model	Canopy (Diameter x Height)	Fixture (Diameter x Height)
HUDP-24D	10.25" x 1.63"	24.00" x 1.75"
HUDP-36D	13.75" x 1.75"	36.00" x 1.75"
HUDP-48D	13.75" x 1.75"	48.00" x 1.75"

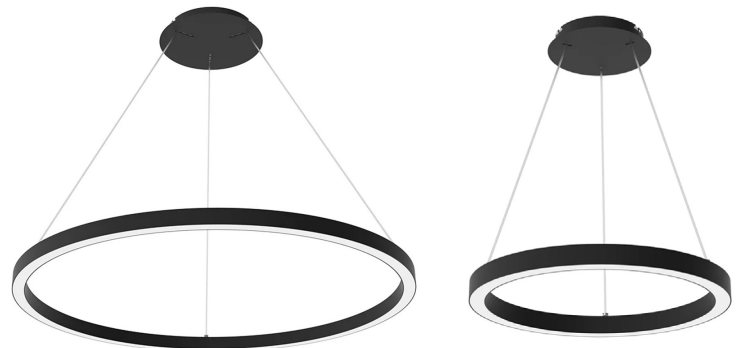

## WARRANTY & LISTINGS

- Warranty: 5 years (50,000 operational hours).
- Certifications: ETL Listed. IP Rating: IP20.

## LIGHTING

- Dimmable: 0~10V Dimming
- MCTP: Multi Color Temperature and Power (Selectable, The Switches Are Inside The Canopy)
- Color Temperatures: 3000K/3500K/4000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 114°(H) x 114°(V)

## APPLICATION

- Conference rooms
- Open office layouts
- Hotel lobbies

## FINISH OPTIONS



Black or White Finish Options




## ORDERING INFORMATION

Product Code	Size	Wattage	Lumens	Color Temperature	Finish
HUDP-24D-MCTP-BK	24 INCH	(Downlight Switchable) 20W/40W	1500LM 3000LM	Color Selectable 3000K 3500K 4000K	Black
HUDP-24D-MCTP-WH		(Uplight Switchable) 20W/40W = MAX 80W			White
HUDP-36D-MCTP-BK	36 INCH	(Downlight Switchable) 40W/60W	3000LM 4500LM		Black
HUDP-36D-MCTP-WH		(Uplight Switchable) 40W/60W = MAX 120W			White
HUDP-48D-MCTP-BK	48 INCH	(Downlight Switchable) 60W/ 80W	4500LM 6000LM		Black
HUDP-48D-MCTP-WH		(Uplight Switchable) 60W/80W = MAX 160W			White

# LED Halo Pendant With Up/Down Lights

Search Code: SC96953

## PHOTOMETRICS

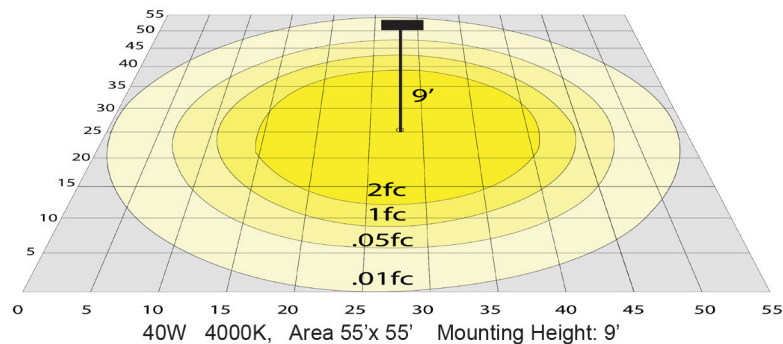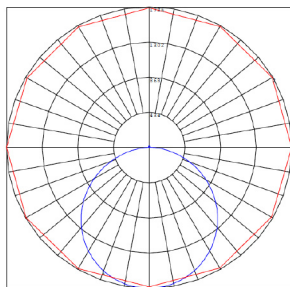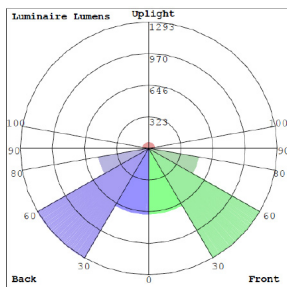


## INFOGRAPHIC

### Up & Down Light Control

- Full Power (Up & Down): Maximum illumination for complete space coverage
- Full Downlight / Soft Uplight: Strong task lighting with a subtle ambient ceiling glow
- Full Uplight / Soft Downlight: Enhanced ambient lighting with reduced direct output


Model	Lumens
HUDP-24D	1500LM 3000LM
HUDP-36D	3000LM 4500LM
HUDP-48D	4500LM 6000LM

### UP LIGHT




Uplight is emitted from the top edge of the fixture.  
Example: 20W /40W (Top)

### DOWN LIGHT



Downlight is emitted from the bottom surface of the fixture.  
Example: 20W /40W (Bottom)

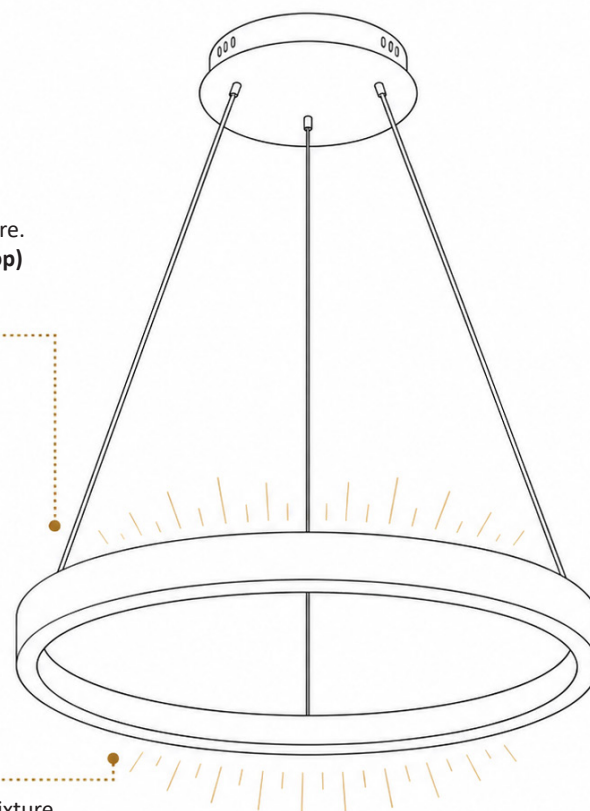

### INDEPENDENT CONTROL

Wattage: Independent switches to control output for both up and down light.

Control each light independently to set the perfect ambiance.