

HAZARDOUSE EXIT EMERGENCY COMBO

SEARCH CODE: SC44363




FEATURES:

- Two fully adjustable, ultra bright 3.6 watt high performance MR-16 base LED lamp heads for optimized center-to-center spacing.
- Long-life, energy efficient Red or Green LED EXIT sign illumination.
- Housing is fiberglass reinforced polycarbonate construction in gray finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- EZ snap-out Chevron directional indicators.

MOUNTING:

- Pre-installed conduit hub for conduit and pendant-mount installations.

DIMENSIONS:

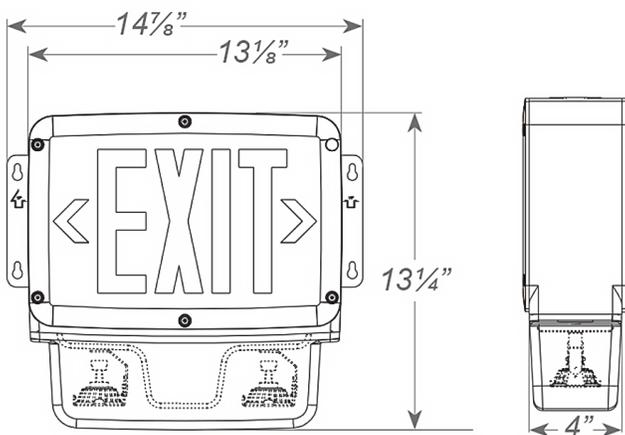

WARRANTY & LISTINGS:

- 5-year warranty on all electronics and housing. Batteries prorated for five years.
- Meets UL924, UL844, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- IP66 rated for Ingress Protection.
- UL listed for wet locations (0°C – 50°C) (32°F – 122°F).

ELECTRICAL:

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check-battery).
- Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.
- 6V/12V maintenance-free, rechargeable NiCd battery (12W, 15W models).
- Offers 4.8W and 7.8W of remote capacity (6V/12V DC output) standard on the 12W and 15W models.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

SPECIFICATIONS:

Product Code	Wattage	Letter Color	Configuration	Battery Voltage
HLCWLEZU1R612G	12 Watt	Red	Single Face	6V
HLCWLEZU1G612G	12 Watt	Green	Single Face	6V
HLCWLEZU2R1215G	15 Watt	Red	Double Face	12V
HLCWLEZU2G1215G	15 Watt	Green	Double Face	12V

