

HAZARDOUSE LOCATION LED EXIT SIGN

SEARCH CODE: SC44362




FEATURES:

- Ultra bright, energy efficient, long life Red or Green LEDs.
- Housing is fiberglass reinforced polycarbonate construction in gray finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- EZ snap-out Chevron directional indicators.

MOUNTING:

- Die-cast mounting brackets provided for surface wall-mount installation.
- Pre-installed conduit hub for conduit and pendant-mount installations.

DIMENSIONS:

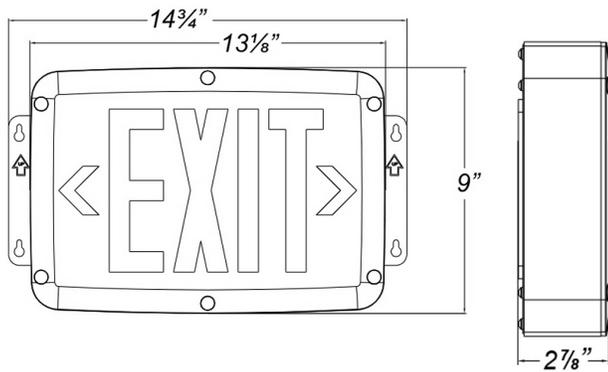

WARRANTY & LISTINGS:

- 5-year warranty on all electronics and housing. Batteries prorated for five years.
- Meets UL924, UL844, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- IP66 rated for Ingress Protection.
- Certified to CEC under Title 20 Regulations.
- UL listed for wet locations (-20°C - 50°C)(-4°F to 122°F)

ELECTRICAL:

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.
- 4.8V long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

SPECIFICATIONS:

Product Code	Wattage	Letter Color	Configuration	Accessories Included
HLWLEZU1RGEM	3 Watt	Red	Single Face	NiCd Battery
HLWLEZU1GGEM	3 Watt	Green	Single Face	NiCd Battery
HLWLEZU2RGEM	3 Watt	Red	Double Face	NiCd Battery
HLWLEZU2GGEM	3 Watt	Green	Double Face	NiCd Battery

