

# LED HIGH PERFORMANCE EMERGENCY UNIT


**QUICK SEARCH: SC12300**



## FEATURES:

- Ultra-bright, energy efficient, long-life White LED adjustable lamp heads provide up to 100-ft center-to-center spacing with a 3-ft path of egress at 7-1/2-ft mounting height
- High performance chrome-plated metallized reflector and plastic lens
- 5.0 watt (12 LEDs x 0.42watt) per head
- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish

## DIMENSIONS:

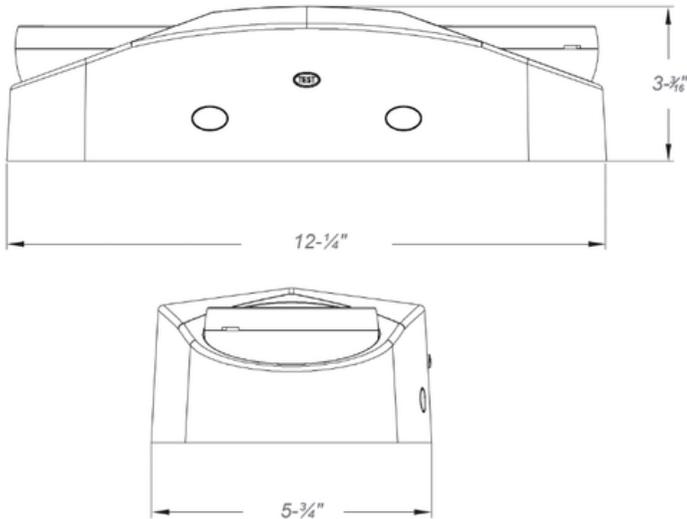

## WARRANTY & LISTINGS:

- 5-year warranty
- UL listed for damp locations (20°C - 40°C)(68°-104°F)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- Certified to CEC under title 20 regulations

## ELECTRICAL:

- Dual 120/277 voltage
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery)
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 9.6V long-life, maintenance-free, rechargeable lithium iron phosphate battery
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

## MOUNTING:

- Universal knockout pattern on back plate for surface mount
- Knockouts provided for conduit feed applications
- Suitable for wall or ceiling mount

## SPECIFICATION:

Product Code	Wattage	Color
HPEMW	5W	White
HPEMB		Black