

# Indirect LED Post Lights

Search Code: SC65674



## FEATURES

- Powder Coating: Black, Bronze, or Silver.
- Aluminum Housing & PC Lens.
- Multi-CCT & Power: Switch Is Inside Fixture
- Modern clean design.
- Dimmable Options: Standard 0-10v smooth dimming compatibility.
- Versatile Applications: Suitable for commercial and residential settings.
- Customizable Settings: Tunable wattages and color selectable temperatures 3000K/4000K/5000K.
- Beam Angle: 85° beam spread.
- IP66 Suitable For Wet Location.
- Long Lifespan: Rated for up to 50,000 operational hours.

## ELECTRICAL

- Input Voltage: 120-277V AC.
- CRI: >80.
- Power Factor: >0.90.
- Operating Temperature Range: 0-122°F.
- Frequency Range: 60Hz.
- EPA (Effective Projected Area) Rating: 2.43 Square Feet.
- LED: LED 3030.

## Applications

- Courtyards.
- Public Parks.
- Gardens.




## WARRANTY & LISTINGS

- Warranty: 5 years (50,000 operational hours).
- Certifications: ETL Listed, IP66 Wet location Rated.

## MOUNTING

- Easy installation Fits on a 2.8 inch diameter post.

## DIMENSIONS

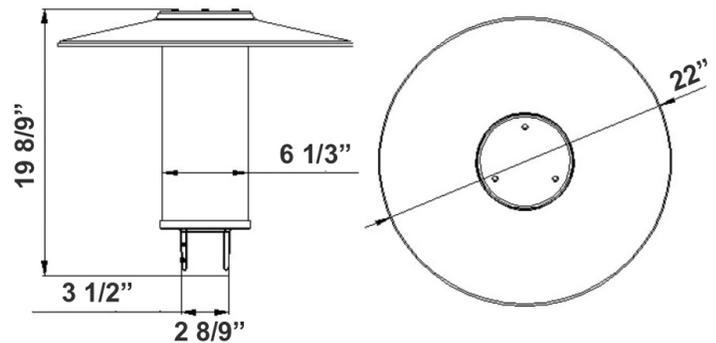

## ORDERING INFORMATION

Product Code	Finish	Wattage	Lumens	Color Temperature
7619CLB-40MW-MCTP-BL	Black	Tunable Wattage 12W/20W/30W/40W	4000LM Max	Selectable 30K/40K/50K
7619CLB-40MW-MCTP-BR	Bronze	Tunable Wattage 12W/20W/30W/40W	4000LM Max	Selectable 30K/40K/50K
7619CLB-40MW-MCTP-SL	Silver	Tunable Wattage 12W/20W/30W/40W	4000LM Max	Selectable 30K/40K/50K

# Indirect LED Post Lights

Search Code: SC65674



## PHOTOMETRICS

