

# Multi Color Architectural Edge-Lit Wing Troffer

Search Code: SC65438




## FEATURES

- **High Efficiency:** Up to 115 lm/W
- **Durable Construction:** White powder-coated finish with premium LED chips and individual aluminum heat sinks for superior efficiency, thermal management, and lumen stability.
- **Lens:** Polycarbonate sloped lens for enhanced light distribution.
- **Versatile Applications:** Available in 2'x2' and 2'x4' options for standard recessed installations.
- **Dimmable Options:** 0-10v smooth dimming compatibility. Requires low voltage dimmer (extra low voltage wires will need to be run prior to installation).
- **Customizable Settings:** Available in multiple wattages and color temperatures. Color temperature is adjustable using a switch inside the driver box allowing for 35/40/50K.
- **IP Rating:** IP20 damp location (Indoor use only).
- **Long Lifespan:** Rated for up to 50,000 operational hours.

## ELECTRICAL

- **Voltage:** AC 120-277V.
- **CRI:** >80.
- **Power Factor:** > 0.92.
- **Operating Temperature Range:** (-17°C to 40°C) 0°F to 104°F.
- **Frequency Range:** 50Hz~60Hz.

## PHOTOMETRICS

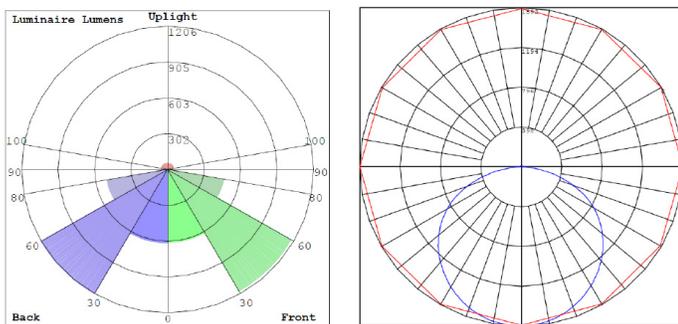

BUG Rating: B2-U3-G1



## WARRANTY & LISTINGS

- **Warranty:** 5 years (50,000 operational hours).
- **Certifications:** UL Listed.


## MOUNTING

- Standard grid ceiling drop in mounting.

## APPLICATION

- Offices & Conference Rooms.
- Retail Stores & Showrooms.
- Hospitals & Healthcare Facilities.
- Schools & Universities.
- Hallways & Entryways.

## DIMENSIONS

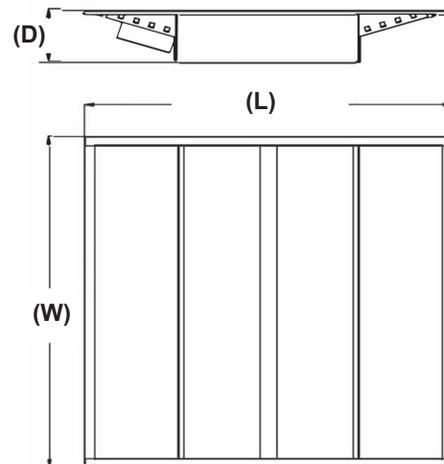

Model	Length	Width	Depth
2'x2'	23.7"	23.7"	3.5"
2'x4'	47.7"	23.7"	3.78"

## ORDERING INFORMATION

Product Code	Size	Wattage	Lumens	Color Temperature
EWTF-2X2-MCTP4	2'x2'	Multi Watt 24W/36W	2760L/4140L	Color Select 30/35K/40K/50K
EWTF-2X4-MCTP4	2'x4'	Multi Watt 42W/50W	4830L/5750L	Color Select 30/35K/40K/50K