Square Garage LED Canopy Light Fixtures
Search Code: SC5676

SUPERIOR LIGHTING
energy saving LED lights

UL LISTED • DLC LISTED • WET RATED • SELECTABLE CCT

FEATURES

- *High Efficiency: Up to 150 lm/W (On Select Models).*
- *Durable Construction: Sealed Die-cast profile aluminum heat sink and housing for optimal heat dissipation. Impact-resistant polycarbonate lens with a bronze or white powder coat Finish.*
- *Emergency Battery-Backup and Occupancy Sensor options.*
- *Versatile Applications: Suitable for residential and commercial settings.*
- *Dimmable Options: 0-10V smooth dimming compatibility with dim-to-off. (70W Only)*
- *Wet Location Rated. For indoor or outdoor use.*
- *Quick and easy installation. Surface bracket included.*
- *Customizable Settings: Available in multiple wattages and color temperatures. Color temperature is adjustable on select models.*
- *Long Lifespan: Rated for up to 50,000 operational hours.*

ELECTRICAL

- *Input Voltage: 120-277VAC.*
- *Total Harmonic Distortion (THD): < 20%.*
- *CRI: >80.*
- *Power Factor: >0.9.*
- *Operating Temperature Range: (-17ºC to 40ºC) 0ºF to 104ºF.*
- *10kA surge protection standard.*

WARRANTY & LISTINGS

- *Warranty: 5 years (50,000 operational hours).*
- *Certifications: UL, cULus for wet locations, DLC Listed.*

MOUNTING

- *Standard junction box surface mounting, or multiple 1/2" NPS entry point knockouts for accessories or pendant mount.*

ACCESSORIES

- *90 Minute Emergency Battery-Backup.*
- *Occupancy Sensor.*
- *Pendant Mount (Special Order).*

APPLICATION

- *Parking Garage.*
- *Gas Stations.*
- *Walkways.*
- *Automotive Shops.*
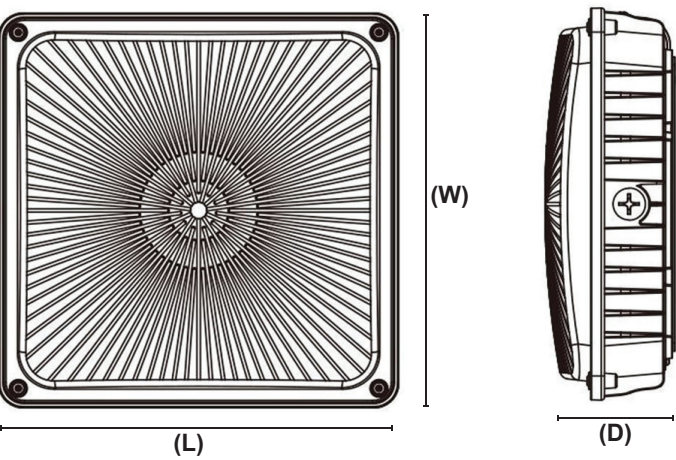- *Warehouses.*

ORDERING INFORMATION

Product Code	Wattage	Lumens	Replaces	Color	Color Temperature	Accessories
7802CLBL036-51K-EM	40W	5400L	100W MH	Bronze	5000K Daylight	Emergency Battery
7802CLWH036-51K	40W	5400L	10W MH	White	5000K Daylight	As Is - None
7802CLBL036-51K	40W	5400L	100W MH	Bronze	5000K Daylight	As Is - None
7802clbl036-MOTION	40W	5400L	100W MH	Bronze	5000K Daylight	PIR Motion Sensor
7802CLBL060-MCT	60W Max	8000L	175W MH	Bronze	Selectable 30K/40K/50K	As Is - None
7802CLBL060-MCT-EM	60W Max	8000L	175W MH	Bronze	Selectable 30K/40K/50K	Emergency Backup
7802CLBL060-MCT-PIR	60W Max	8000L	175W MH	Bronze	Selectable 30K/40K/50K	Occupancy Sensor
SCS-PS60-840-UD-W	60W Max	8000L	175W MH	White	4000K Neutral White	As Is - None
SCS-70W-850-UD-W	70W	9700L	200W MH	White	5000K Daylight	As Is - None
SCS-70W-850-UD	70W	9700L	200W MH	Bronze	5000K Daylight	As Is - None
7802CLBL110-MCT	110W Max	16000L	300W MH	Bronze	Selectable 30K/40K/50K	As Is - None
7802CLBL110-MCT-PIR	110W Max	16000L	300W MH	Bronze	Selectable 30K/40K/50K	PIR Motion Sensor
7802CLBL110-MCT-EM	110W Max	16000L	300W MH	Bronze	Selectable 30K/40K/50K	Emergency Backup

DIMENSIONS

Wattage	Color	Length	Width	Depth
40W	Bronze	9.57"	9.57"	3.07"
40W	White	9.56"	9.56"	3.68"
60W	Bronze	9.52"	9.52"	3.03"
60W	White	10.06"	10.06"	2.83"
70W	Bronze	10.06"	10.06"	2.83"
70W	White	10.06"	10.06"	2.83"
110W	Bronze	11.52"	11.52"	3.80"