

LED Vaportight Garage Light Fixtures

Search Code: SC9935



FEATURES

- **Durable Construction:** thermoplastic housing, high-quality gasketed Polycarbonate lens, Stainless steel mounting bracket and clips.
- **Versatile Applications:** Suitable for residential and commercial settings.
- **Dimmable Options:** TRIAC smooth dimming compatibility with using standard TRIAC LED low voltage dimmers.
- **Waterproof Rating:** 2ft models = IP65, 4ft models = IP66.
- **Quick and easy installation.**
- **Sizes:** 2 Foot or 4 Foot.
- **Customizable Settings:** Available in multiple wattages and color temperatures. Color temperature is adjustable on select models.
- **Super bright high-quality uniform illumination.**
- **Long Lifespan:** Rated for up to 50,000 operational hours.

ELECTRICAL

- **Input Voltage:** 120-277VAC.
- **CRI:** >80.
- **Power Factor:** >90.
- **Total Harmonic Distortion (THD):** < 20%.
- **Operating Temperature Range:** (-17°C to 40°C) 0°F to 104°F.
- **Frequency Range:** 50Hz~60Hz.
- **Dimming:** 0-10V standard - requires low voltage dimmer.
- **10kA surge protection standard.**

APPLICATION

- **Parking Garage.**
- **Car Port.**
- **Warehouse.**
- **Automotive Shops.**
- **Maintenance Areas.**




WARRANTY & LISTINGS

- **Warranty:** 5 years (50,000 operational hours).
- **Certifications:** UL Listed, IP65, IP66.

MOUNTING

- **Standard junction box surface mounting or directly to drywall or concrete surfaces using proper mounting screws (not included).**

DIMENSIONS

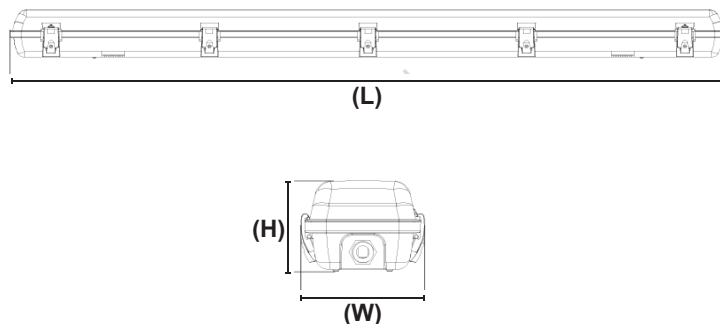

Model	Wattage	Length	Height	Width
2 Foot	25W	24"	3.75"	6.5"
4 Foot	40W	48"	3.75"	4.5"
4 Foot	50W	47.3"	3.7"	5.0"
4 Foot	100W/150W	47.25"	4.3"	10.25"

ORDERING INFORMATION

Product Code	Size	Wattage	Lumens	Color Temperature	Options
6201V-2FT-25W-50K-D	2 Foot	25W	3215L	5000K Daylight	As Is-None
6201V-2FT-25W-40K-D	2 Foot	25W	3215L	4000K Cool White	As Is-None
BVTPLD-40-5KMV-ET	4 Foot	40W	5200L	5000K Daylight	As Is-None
6201V-4FT-50MW-MCT-D	4 Foot	50W	6900L	Selectable 35K/40K/50K	As Is-None
6201V-4FT-50MW-MCT-D-EM	4 Foot	50W	6900L	Selectable 35K/40K/50K	Emergency Battery
6201V-4FT-50MW-MCT-D-PIR	4 Foot	50W	6900L	Selectable 35K/40K/50K	Occupancy Sensor
6201V-4FT-100W-MCT	4 Foot	100W	12500L	Selectable 35K/40K/50K	As Is-None
6201V-4FT-150W-MCT-D	4 Foot	150W	18750L	Selectable 35K/40K/50K	As Is-None