

Compact Wet Location Polycarbonate Exit Sign

Search Code: SC5685



FEATURES

- 5VA flame retardant, UV-stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade silicone gasket.
- Knockouts provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.
- Remote capacity option available.
- Ultra bright, energy efficient, long life Red or Green LEDs.

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

APPLICATION

- Warehouses and factories.
- Distribution Centers.
- Parking Garages.
- Healthcare Facilities.
- Apartment Complexes & Condos.




WARRANTY & LISTINGS

- Warranty: 5 years on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (-20°C – 50°C).
- Certified to CEC under Title 20 Regulations.

MOUNTING

- Polycarbonate mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

DIMENSIONS

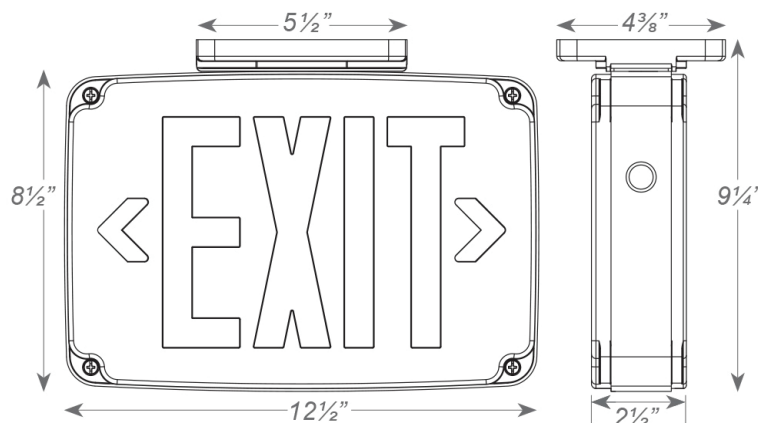

ORDERING INFORMATION

Product Code	Lettering Color	Housing Color
WLEZXTEU-3-R-W-EM	Red	White
WLEZXTEU-3-R-G-EM	Red	Gray
WLEZXTEU-3-R-B-EM	Red	Black
WLEZXTEU-3-G-W-EM	Green	White
WLEZXTEU-3-G-G-EM	Green	Gray
WLEZXTEU-3-G-B-EM	Green	Black