

LED Hollow Circle Pendant Lights

Search Code: SC65523



FEATURES

- **Durable Construction:** Modern design. Aluminum housing with a sandy white or black finish.
- **Lens:** Light Accent Functionality With a Removable Plate covering opal polycarbonate lens with direct down light.
- **Versatile Applications:** Suitable for commercial settings such as offices, hotels, conference halls, and other indoor areas.
- **Dimmable:** 0-10V standard dimming compatibility with using low voltage dimmers.
- **Customizable Settings:** Available in multiple wattages. Multi CCT Choose from 2700K/ 3000K/ 4000K/ 5000K. (Selectable, the switches are inside the Canopy).
- **Beam Angle:** 114°(H) x 114°(V).
- **IP Rating:** IP20.
- **Long Lifespan:** Rated for up to 50,000 operational hours.

ELECTRICAL

- **Input Voltage:** 120-277VAC.
- **Power Factor:** >0.98.
- **Total Harmonic Distortion:** ≤19 %
- **Operating Temperature Range:** (-17°C to 40°C) 0°F to 104°F.
- **Frequency Range:** 50Hz~60Hz.

APPLICATION

- Hotels.
- Condos.
- Offices.
- Conference Halls.
- Saloons.




WARRANTY & LISTINGS

- **Warranty:** 5 years (50,000 operational hours).
- **Certifications:** ETL Listed. IP Rating: IP20.

MOUNTING

- Three 10FT Adjustable Suspension Cables.

DIMENSIONS

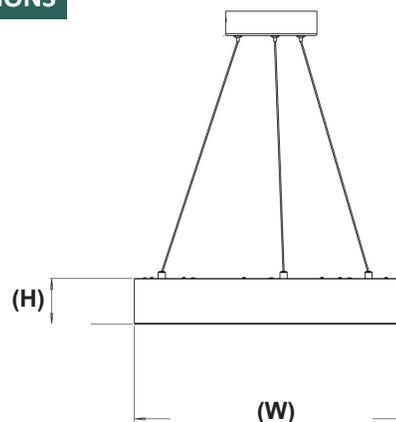

Model	Dimensions
HCP-18IN	18"(W) x 2.95"(H)
HCP-24IN	24"(W) x 2.95"(H)
HCP-36IN	36"(W) x 2.95"(H)

ORDERING INFORMATION

Product Code	Size	Wattage	Color Temperature	Lumens	Finish
HCP-18IN-UD-MCT-WH	18 INCH	30W	Selectable 2700K/3000K/3500K/4000K/5000K	1500L	White
HCP-18IN-UD-MCT-BK	18 INCH	30W	Selectable 2700K/3000K/3500K/4000K/5000K	1500L	Black
HCP-24IN-UD-MCT-WH	24 INCH	40W	Selectable 2700K/3000K/3500K/4000K/5000K	2000L	White
HCP-24IN-UD-MCT-BK	24 INCH	40W	Selectable 2700K/3000K/3500K/4000K/5000K	2000L	Black
HCP-36IN-UD-MCT-WH	36 INCH	80W	Selectable 2700K/3000K/3500K/4000K/5000K	3200L	White
HCP-36IN-UD-MCT-BK	36 INCH	80W	Selectable 2700K/3000K/3500K/4000K/5000K	3200L	Black