

UNIVERSAL DIE-CAST ALUMINUM EXIT SIGNS


QUICK SEARCH: SC6948



FEATURES:

- Ultra-bright, energy efficient, long-life Red or Green LED
- Premium-grade, aluminum housing (also available in black or white powder-coated finishes)
- Field selectable knockout Chevron directional indicators
- Unique design allows double face conversion in the field
- Quick-snap face plate closure

DIMENSIONS:

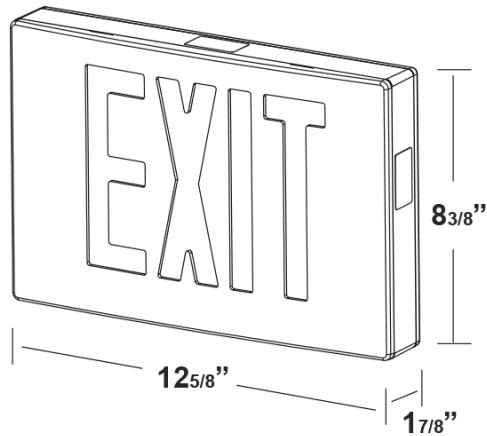

WARRANTY & LISTINGS:

- 5-year warranty
- UL listed for damp locations (20°C - 40°C)(68°-104°F)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

ELECTRICAL:

- Dual 120/277 voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 4.8V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

MOUNTING:

- Aluminum mounting canopy included for top or end mount
- Universal K/O pattern on back plate for wall mount.

SPECIFICATION:

Product Code	Features	Letter Color	Housing Color
KXTEU1RWWEM		Red	White
KXTEU3RBBEM		Red	Black
KXTEU3RAAEM	Die-cast Aluminum Housing	Red	Aluminum
KXTEU3GWWEM	90 Minute Battery Back-up	Green	White
KXTEU3GBBEM		Green	Black
KXTEU3GAAEM		Green	Aluminum