

# Euro Design Pendant Light

Search Code: SC65440




## FEATURES

- **Durable Construction:** LED Superior Architectural Lights with aluminum housing and a sandy black and white finish.
- **Lens:** Opal Polycarbonate tube lens with direct down light, the fixture can be reversed to face up for indirect lighting.
- **Versatile Applications:** Suitable for commercial settings such as offices, hotels, conference halls, and other indoor areas.
- **Dimmable:** Dimmable with 0-10V LED Dimmers. Linking Bracket included with each fixture.
- **Can be installed in series with brackets sold separately upon special request.**
- **Customizable Settings:** Available in multiple wattages. Multi CCT Choose from 3000K/3500K/4000K. Color Temperature and Power Selectable switches are inside the Canopy.
- **Beam Angle:** 115°(H) x 109.6°(V)
- **IP Rating:** IP20, Suitable for damp location.
- **Long Lifespan:** Rated for up to 50,000 operational hours.

## ELECTRICAL

- **Input Voltage:** 120-277VAC.
- **CRI:** ≥80.
- **Power Factor:** >0.95.
- **Operating Temperature Range:** (-17°C to 40°C) 0°F to 104°F.
- **Frequency Range:** 50Hz~60Hz.
- **Total Harmonic Distortion:** ≤19 %

Finish Selection




## WARRANTY & LISTINGS

- **Warranty:** 5 years (50,000 operational hours).
- **Certifications:** UL Listed. IP Rating: IP20 (Damp Location).



## MOUNTING

- **Two 10FT Adjustable Suspension Cables with Canopies Included.**


## DIMENSIONS

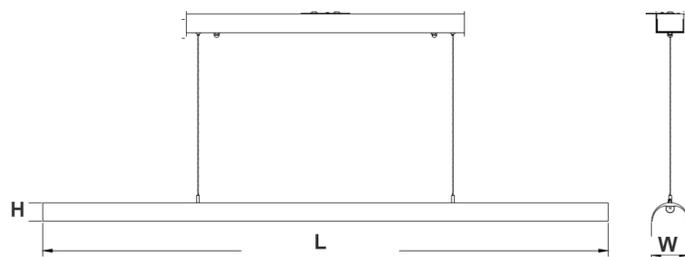

## PHOTOMETRICS



BUD Rating: B1-U2-G1

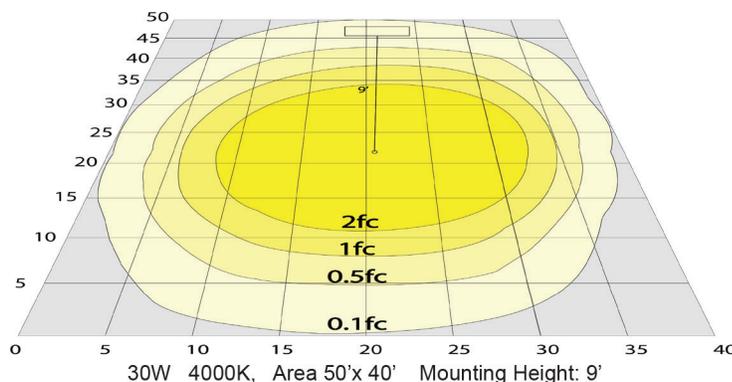

## ORDERING INFORMATION

Product Code	Size	Finish	Wattage	Lumens	Dimensions
EDPL-4FT-MCTP-WH	4 Foot	White	Multiwatt 20W/25W/30W	2500L	48"(L) x 2 1/3"(W) x 3 1/6"(H)
EDPL-4FT-MCTP-BK	4 Foot	Black	Multiwatt 20W/25W/30W	2500L	48"(L) x 2 1/3"(W) x 3 1/6"(H)
EDPL-8FT-MCTP-WH	8 Foot	White	Multiwatt 40W/50W/60W	4500L	96"(L) x 1 1/2"(W) x 3 1/6"(H)
EDPL-8FT-MCTP-BK	8 Foot	Black	Multiwatt 40W/50W/60W	4500L	96"(L) x 1 1/2"(W) x 3 1/6"(H)